


## Before you begin...

- Check all components are present by comparing pack contents to printed contents list.
- Pre-treat each Porch Canopy component using proprietary exterior grade preservative and end seal following the manufacturer's recommendations.
- We recommend that all components are finished e.g. painted, stained or varnished following the manufacturer's recommendations before fixing to wall.

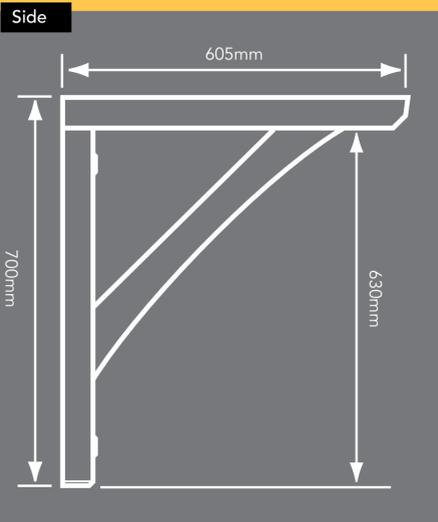

### Pack contents...

	673x68x55mm	x1
	650x90x45mm	x1
	605x68x55mm	x1
	ø15x105mm	x3
	40x40x9mm	x4

Wall fixings not included. Please seek advice to determine the correct fixing for your wall.

### Tools required...

1. Drill			
2. Mallet	1.	2.	3.
3. Screwdriver			
4. Hammer	4.	5.	6.
5. Spirit level			
6. Tape measure	4.	5.	6.




Richard Burbidge

# Gallows Bracket

605x700mm

Components are supplied pre-drilled.

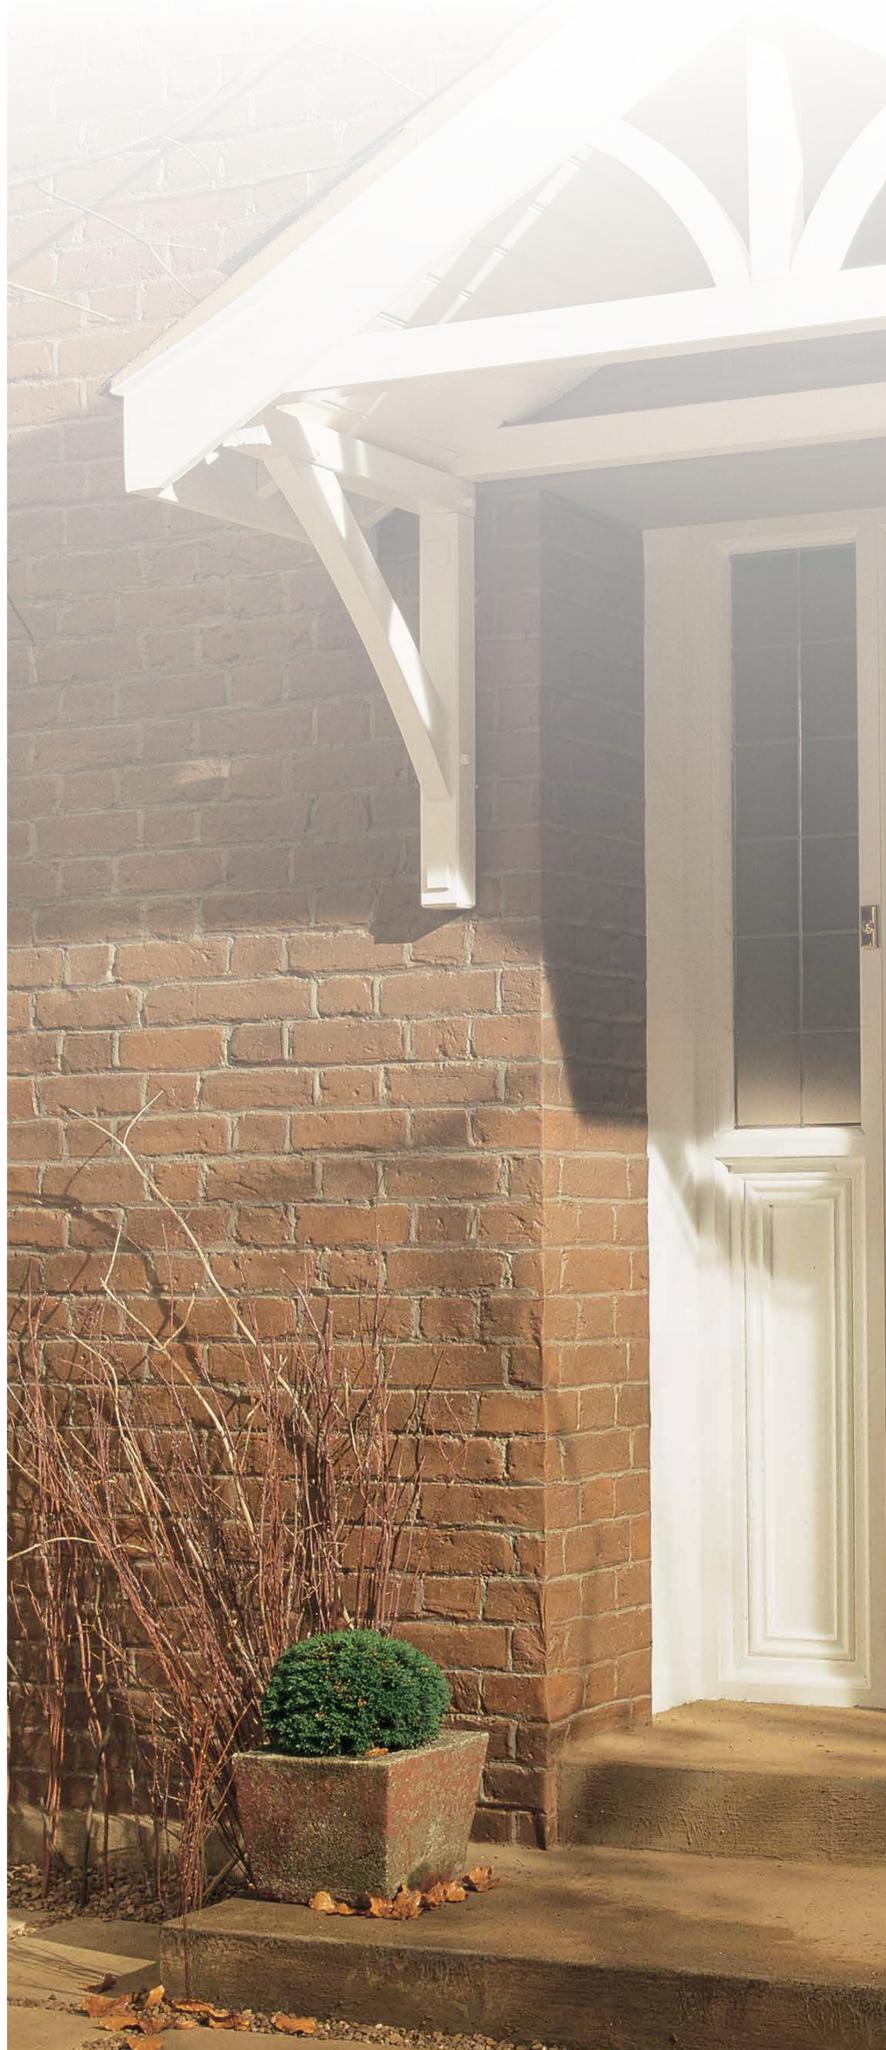

Richard Burbidge Porch Canopies have been structurally tested to hold a maximum weight loading of 50kg/m<sup>2</sup>. Structural calculations are based on fixing to masonry surfaces such as brick, block and stone. If fixing to other surfaces such as timber, we recommend you seek professional guidance/advice via a structural engineer.

## Assembly instructions...



Measure and mark the Gallows Bracket locations.



Assemble the Gallows Brackets using exterior grade wood glue (Fig 2).



Knock the 15mm diameter dowels supplied into the pre-machined draw-bored tenons (Fig 3).



Offer and fix the assembled Gallows Brackets to the pre-marked wall positions and fix using 2 x 12mm Steel Bolts (not supplied). Glue the timber cover caps supplied to hide fixings (Fig 4).



Why not improve the look of the front of your home by choosing from a range of Richard Burbidge Porch Canopies. Further details available on our website or our brochure.

LC300

Note: Canopy, roofing, fascias, finishing components, wall fixings and exterior glue are not included. Finial sold separately.

Maintenance - We recommend you retreat your Porch Canopy and Accessories Kits annually by cleaning and repainting, staining or varnishing following manufacturer's recommendations.

If LC300 is not being used with suitable Richard Burbidge canopy, the installer must satisfy themselves that the structure meets the maximum weight loading requirements.



5 000473 048023 >

We're here when you need us:  
Customer Services:  
+44 (0)1691 678300  
Technical Helpline:  
+44 (0)1691 678212  
www.richardburbidge.com